


## Installing the wiring for the handle controls into the handle

1. Put the white end of the cable through the loop in the wire.



2. Run the wire up through the handle and out of the end.

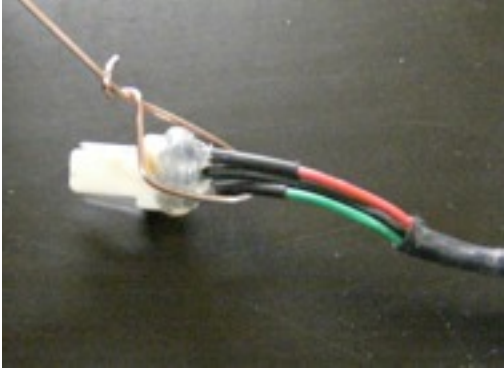

3. Pull the wire and cable all the way through. Loop the wire and run it back into the end of the handle and out through the large hole in the grip.



4. Plug button strip into the end of the cable and carefully pull extra cable into handle.
5. Use screws to attach to the handle and put new overlay over the buttons.